


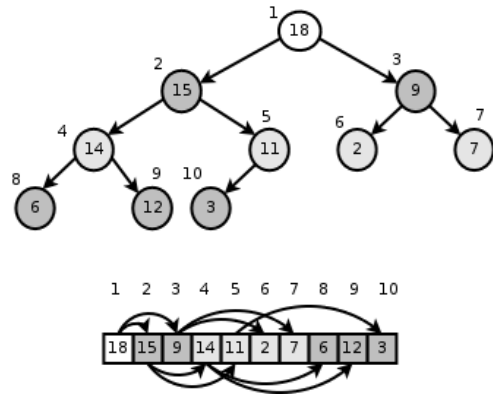


```

INSERTION-SORT(A)
1  for j = 2 to A.length
2    key = A[j]
3    // Insert A[j] into the sorted
   sequence A[1..j-1].
4    i = j - 1
5    while i > 0 and A[i] > key
6      A[i + 1] = A[i]
7      i = i - 1
8    A[i + 1] = key

```

cost	times
c_1	n
c_2	$n - 1$
c_3	$n - 1$
c_4	$n - 1$
c_5	$\sum_{j=2}^n t_j$
c_6	$\sum_{j=2}^n (t_j - 1)$
c_7	$\sum_{j=2}^n (t_j - 1)$
c_8	$n - 1$

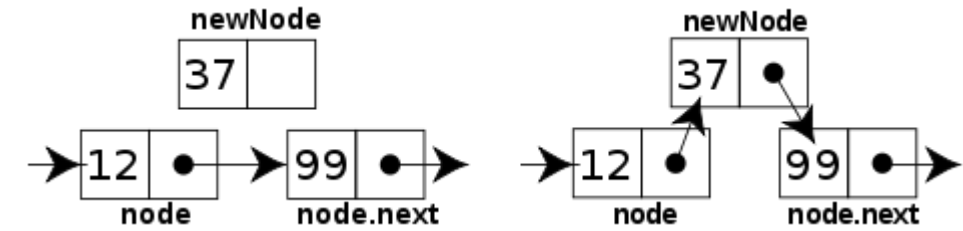

WELCOME TO CS 24!

Problem Solving with Computers-II

Instructor: Diba Mirza

C++

```

#include <iostream>
using namespace std;

int main() {
    cout << "Hola Facebook!\n";
    return 0;
}


```

Read the syllabus. Know what's required. Know how to get help.

About this course

You will learn to:

- Design and implement **larger programs** that **run fast**
- Organize **data** in programs using **data structures**
- **Analyze** the **complexity** of your programs
- Understand what goes on **under the hood of programs**

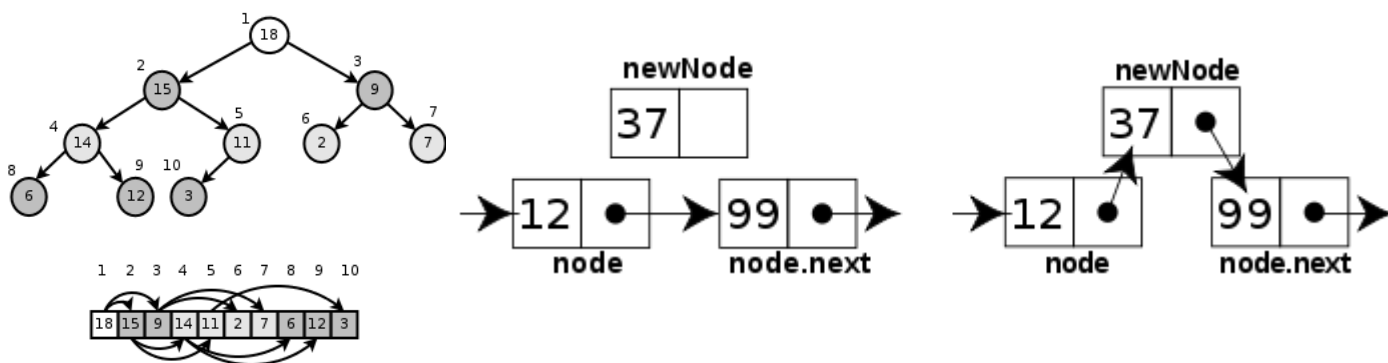

```

INSERTION-SORT(A)
1  for j = 2 to A.length
2    key = A[j]
3    // Insert A[j] into the sorted
   sequence A[1..j-1].
4    i = j - 1
5    while i > 0 and A[i] > key
6      A[i + 1] = A[i]
7      i = i - 1
8    A[i + 1] = key
  
```

cost	times
c_1	n
c_2	$n - 1$
0	$n - 1$
c_4	$n - 1$
c_5	$\sum_{j=2}^n t_j$
c_6	$\sum_{j=2}^n (t_j - 1)$
c_7	$\sum_{j=2}^n (t_j - 1)$
c_8	$n - 1$

Data Structures and C++

Complexity Analysis



Diba Mirza



TAs: Samridhi



Kaiwen



Tyler



Evelyn

- Prof. Mirza's OH:
MW 2:30-3:30p, HFH 1155
- Communication with staff via **Piazza**
- Include [CS24] in the subject line of any email communication with me
- Sections start this week
- Office hours start next week


Ask questions about class examples, assignment questions, or other CS topics.



TA: Lijuan



ULAs: Zack

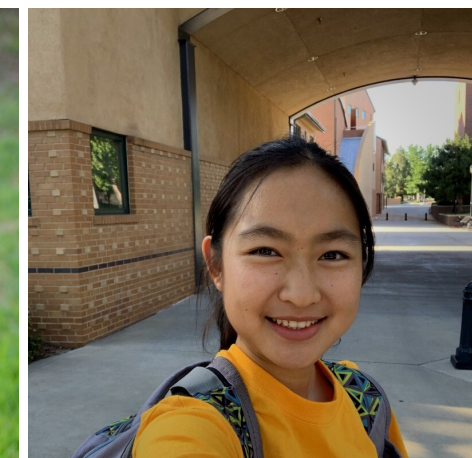

Rachel

Course Logistics

- Course website: <https://ucsb-cs24.github.io/w23>
- If you have a section conflict, you may informally switch your section time.
- NO MAKEUP ON EXAMS!
- Submit assignments early to get a “timeliness” bonus!
- To complete the labs you need a college of engineering account. If you don't have one yet, send an email to help@engineering.ucsb.edu

iClicker Cloud

- Instructions to register for iclicker cloud for free are on Gauchospace
- Download the iclicker REEF app to participate in class
 - 1.Login: <https://app.reef-education.com/#/login>
 - 2.Join the class: CMPSC24: Problem Solving with Computers-2

Required textbook

Zybook: CMPSC 24: Problem Solving with Computers II

Recommended textbook

- Problem Solving with C++, Walter Savitch, Edition 9

You must **attend** class and lab sections

You must **prepare** for class

You must **participate** in class

About you: When did you take CS16?

- A. Fall 2022
- B. Summer 2022
- C. Spring 2022
- D. Sometime before Spring 2022

About you: How was your experience in CS16?

- A. Great! I enjoyed the course.
- B. A little rocky. I struggled a bit but was able to get help when needed.
- C. I struggled a lot but felt connected to the staff and my peers
- D. I struggled a lot


How confident do you feel about CS16 topics?

- A. Very confident
- B. Somewhat confident
- C. Not confident

About lectures


- I will not be a talking textbook
- Ask questions anytime!
- I'll ask you questions too! Be ready to discuss with the people near you and respond to multiple-choice questions (using the clickers).
- Take a moment to introduce yourself to the people sitting near you.
 - Talk about...
 - your background,
 - experience in CS so far, and
 - what you hope to get out of this class!

Review: Recursion

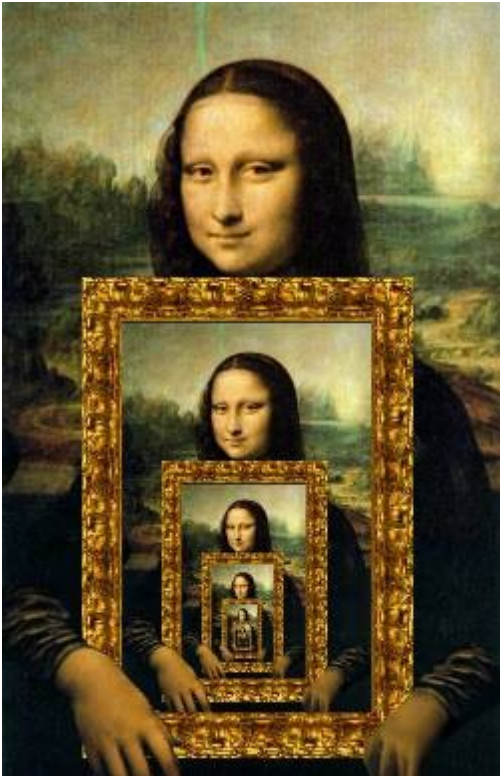

Review: Recursion




- Solve the simplest case of the problem
- Solve the general case by describing the problem in terms of a smaller version of itself

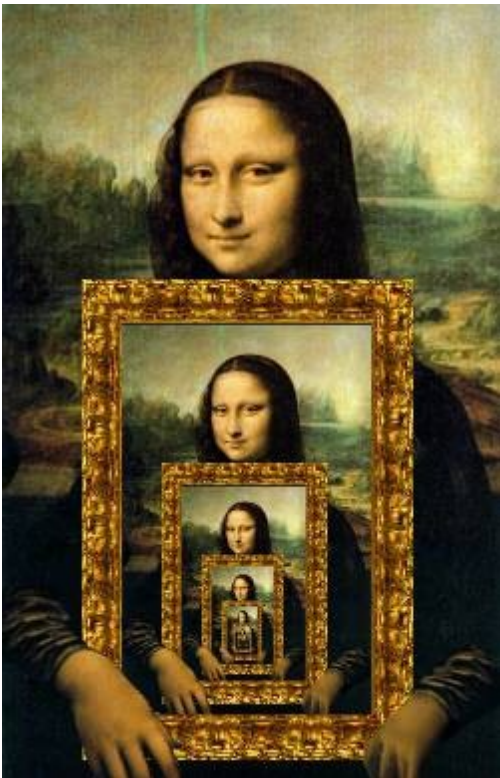

Thinking *recursively*

$$\begin{aligned} N! &= N * (N-1)! , \text{ if } N > 1 \\ &= 1, \text{ if } N \leq 1 \end{aligned}$$

Recursion == **self**-reference!

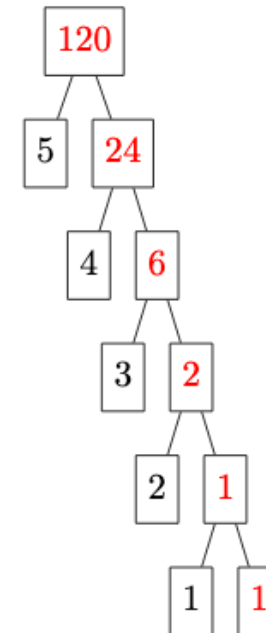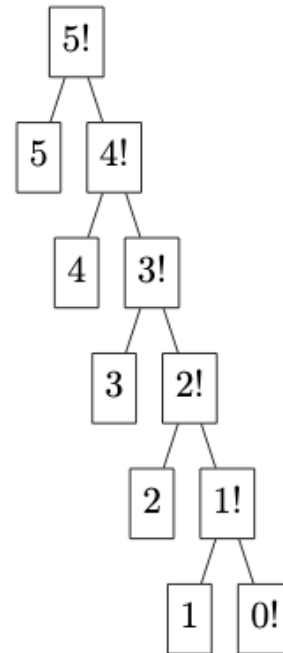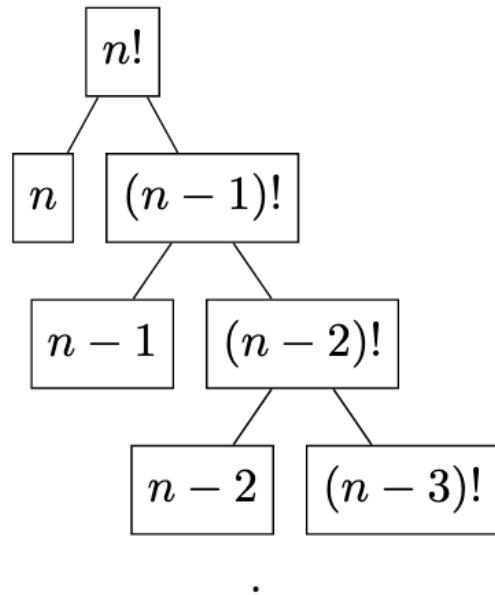


Computing a recursive
function

Designing Recursive Functions

```
int fac(int N) {  
    if (N <= 1) {  
        return 1;  
    }  
}
```

Base case:

Solution to inputs where the answer is simple to solve

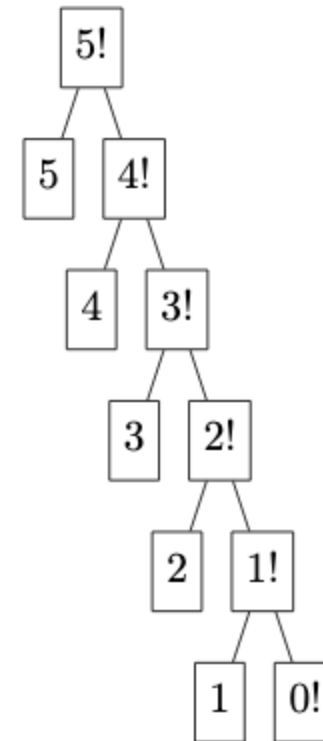


Designing Recursive Functions

```
int fac(int N) {  
    if (N <= 1) {  
        return 1; }  
  
    return N* fac(N-1) ;  
}
```

Base case

Recursive case

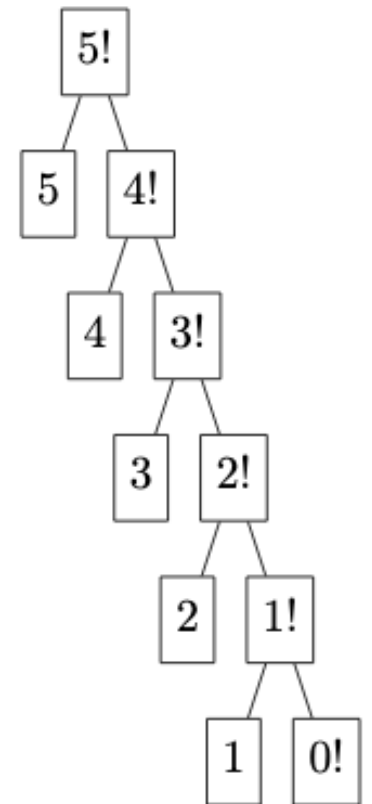

Human: Base case and 1 step

Computer: Everything else

Warning: *this is legal!*

```
int fac(int N) {  
    return N* fac(N-1) ;  
}
```

legal != recommended

```
int fac(int N) {  
    return N* fac(N-1) ;  
}
```

No *base case* -- the calls to **fac** will never stop!

Make sure you have a **base case**, *then* worry about the recursion...

Word Scrambling



Recursively print all scrambling of the letters
“abc”

Coding
demo

Review: Tracing code involving pointers

```
int* p;  
int x = 10;  
p = &x;  
*p = *p + 1;
```

Q: Which of the following pointer diagrams best represents the outcome of the above code?

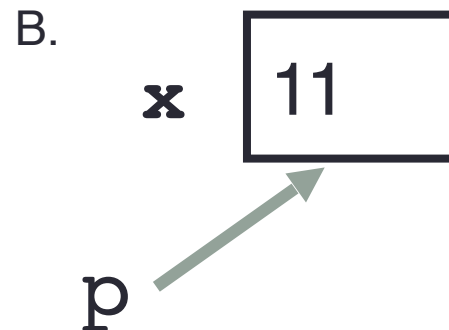
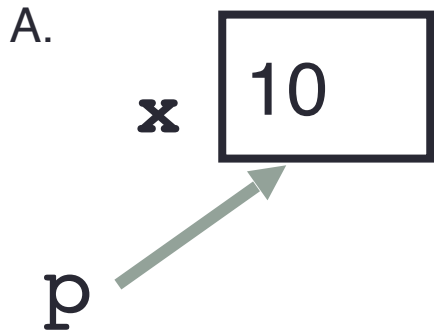


C. Neither, the code is incorrect

Review: Pointer assignment

```
int* p1, *p2, x;  
p1 = &x;  
p2 = p1;
```


Q: Which of the following pointer diagrams best represents the outcome of the above code?

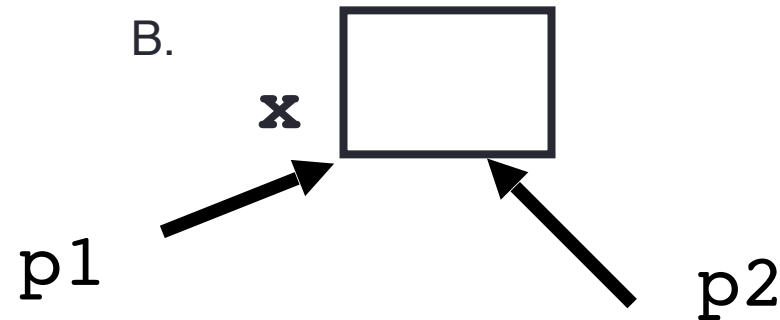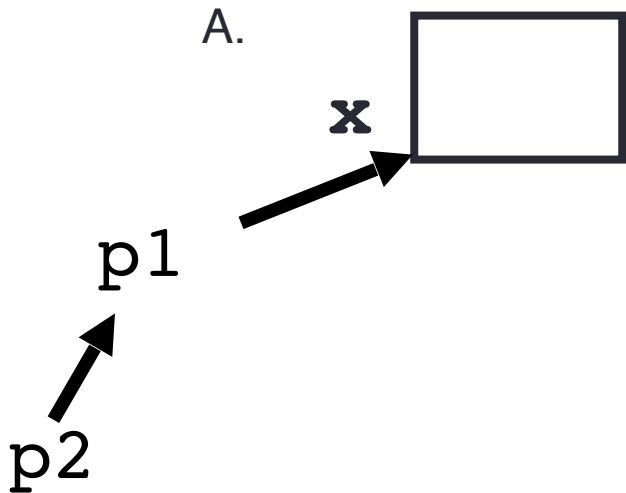

C. Neither, the code is incorrect

Assume the following linked list exists

```
struct Node {  
    int data;  
    Node *next;  
};
```

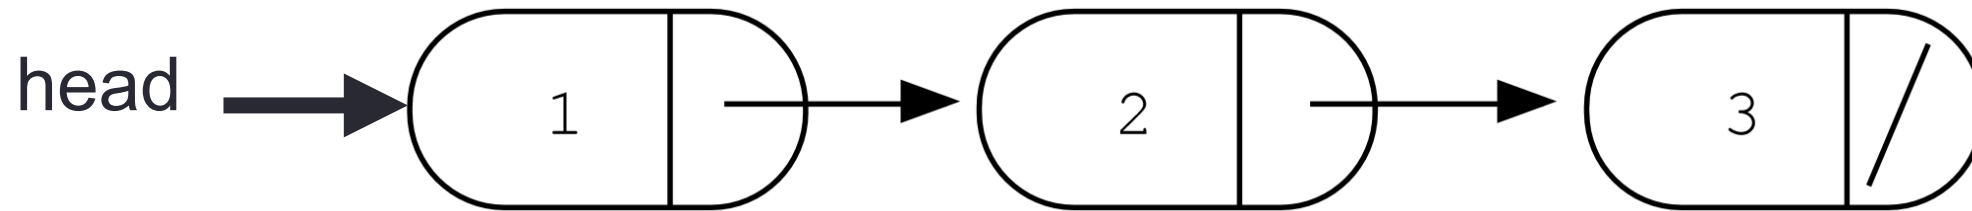


Evaluate each of the following expressions?

1. head->data
2. head->next->data
3. head->next->next->data
4. head->next->next->next->data

- A. 1
- B. 2
- C. 3
- D. nullptr
- E. Run time error

Accessing nodes in a linked list

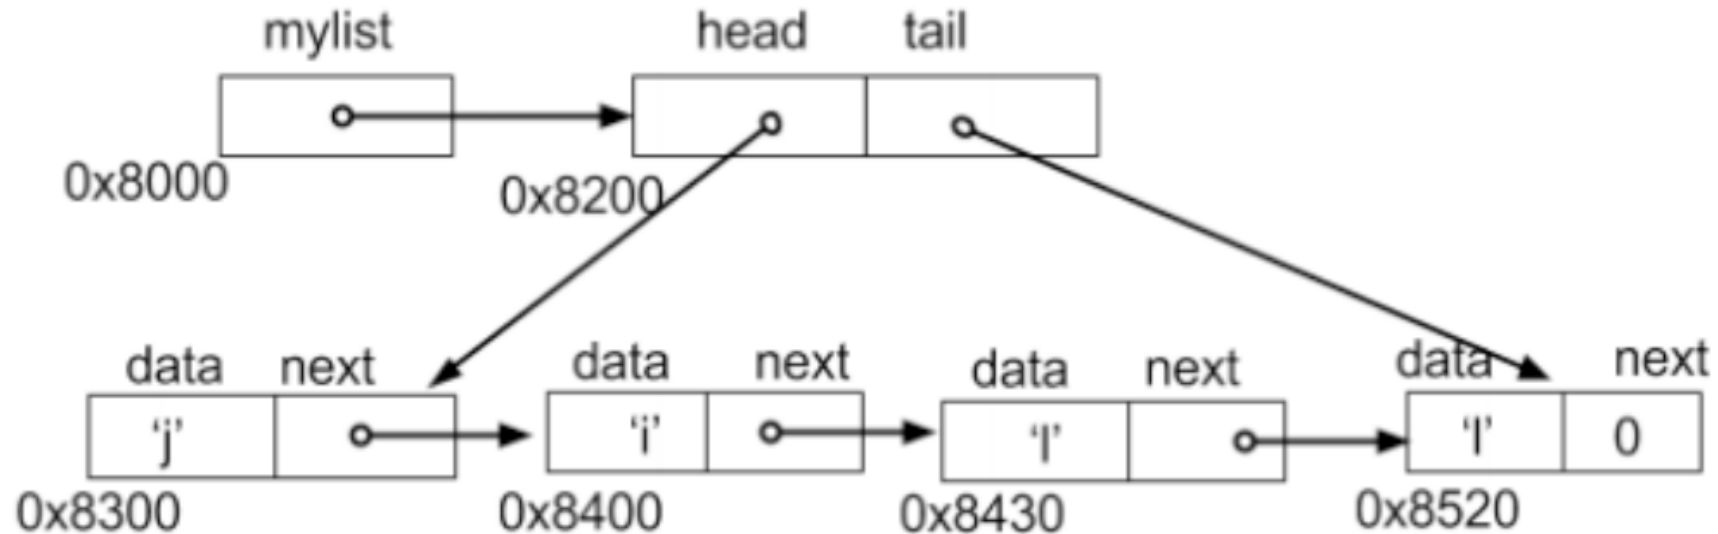

a. `cout<<mylist;`

b. `cout<<mylist->tail;`

c. `cout<<mylist->tail->data;`

d. `cout<<mylist->head->next;`

e. `cout<<mylist->head->next->`

Two important facts about Pointers

1) A pointer can only point to one type –(basic or derived) such as `int`, `char`, a `struct`, a `class` another pointer, etc

2) After declaring a pointer: `int *ptr;`
`ptr` doesn't actually point to anything yet.

We can either:

- make it point to something that already exists, OR
- allocate room in memory for something new that it will point to

Review: Heap vs. stack

```
1 #include <iostream>
2 using namespace std;
3
4 int* createIntArray(int len){
5
6     int arr[len];
7     return arr;
8
9 }
```

Where does the above function create the array of integers?

A. Stack

B. Heap

C. Don't know, what do you mean by stack and heap?

Next time

- We'll solve the final exam for CS16 (Fall 2022)
- Bring your laptops to class!